


N-type monocrystalline high-efficiency bifacial double glass module

Maximum module efficiency

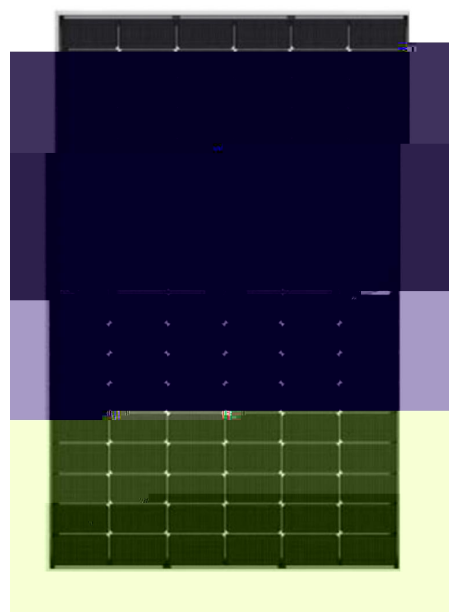


up to 22.5%.

12

- 12-year product warranty
- 1% 1st-year power degradation

30

- 30-year linear power warranty
- 0.4% annual power degradation

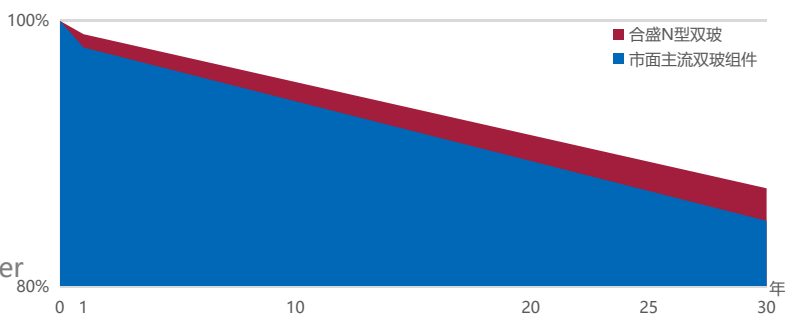

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System (QMS)

ISO14001:2015: Environmental Management System

ISO45001:2018:Occupational Health and Safety Management System





Mechanical Parameters

Cell type	N-type Monocrystalline solar cells
-----------	------------------------------------

Number of half cell	108 (6×18)
---------------------	------------

Dimensions	1722×1134×30mm
------------	----------------

Weight	20.5kg
--------	--------

Front Glass	1.6mm anti-reflective coating glass
-------------	-------------------------------------

Back Glass	1.6mm Heat-strengthened glass
------------	-------------------------------

	Anodized aluminum alloy
--	-------------------------

